FORT JEFFERSON REPAIR BASTIONS 2 AND 3 DRY TORTUGAS NATIONAL PARK, FL

LOCATION:
Dry Tortugas National Park, FL

CLIENT:
National Park Service - Denver

PROJECT SIZE:
$10,042,590

DATES OF PERFORMANCE:
08/05/2015-03/14/2018

ARCHITECT:
Lord Aeck & Sargent; Susan Turner, AIA
(404-253-1442, sturner@lordaecksargent.com)

PROJECT CONTACT:
Kelly Clark, Cultural Resources
(305-296-5578, kelly_clark@nps.gov)

SCOPE OF WORK:
Repair brick masonry scarp wall; remove iron components of shutter assembly; partial reconstruction of shutter assembly; reconstruction of embrasure openings; repair and repoint scarp wall.

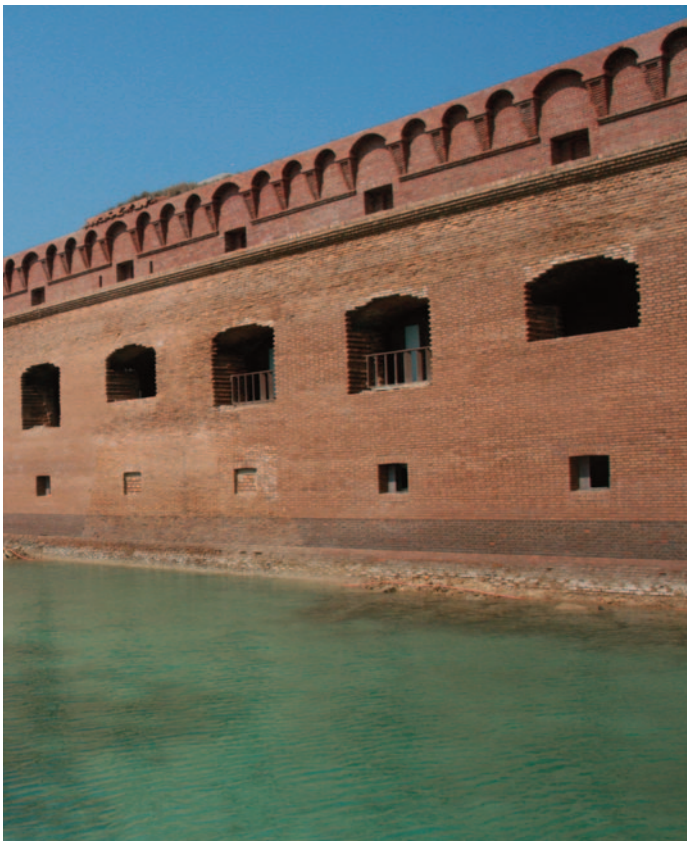

PROJECT SUMMARY

Stone & Lime Historic Restoration Services was contracted for the following: repair the brick masonry scarp wall including masonry demolition; removal of iron components of the historic Totten shutter assembly; partial reconstruction of the shutter assembly using cast concrete replacement components, reconstruction of the embrasure openings; and,repair and repointing of the scarp wall from approximately the magistral line to the top of the parapet.

24 East Brookfield Rd.
North Brookfield, MA 01535

Office: 508-867-6100
www.stoneandlime.com

NIVERSAL